

# FORCE TOOL SERIES



For The  
Way...

# You Work!





# SIoux TOOLS POWER TOOLS WARRANTY

Except as otherwise provided herein, Sioux Tools warrants the product for 1 year from the date of original purchase against defects in workmanship and materials that prevent their use. Consumable parts are warranted, at the time of sale, against defects in workmanship and materials that prevent their use. Consumable parts are goods reasonably expected to be used up or damaged during use, including but not limited to, cables, sensors and batteries. This warranty only extends to the original Buyer and cannot be transferred or assigned.

In the event the product fails to give satisfactory service due to a defect in materials or workmanship during the specified warranty period, at its option, Sioux Tools will repair or replace the product or provide a refund by repaying or crediting the Buyer with an amount equal to the purchase price of the product. Repair, replacement or refund shall be at the sole election and expense of Sioux Tools and is Buyer's exclusive remedy in place of all other rights and remedies. To obtain warranty service, contact Sioux Tools or a Sioux Tools representative or distributor. Proof of purchase must be provided with all warranty service requests. By repairing or replacing the product, or providing a refund, Sioux Tools does not waive a claim that the product nevertheless has been subject to abnormal use.

Sioux Tools does not provide any warranty for (i) recalibration; or (ii) product subject to "abnormal use". "Abnormal use" includes misuse, accident, modification, alteration, unreasonable or improper use, abuse, neglect, lack of maintenance, use in product related service, or use after the product is significantly worn. Further, this warranty DOES NOT cover any damage to, or in operability or improper operation of the product caused by, resulting from or attributable to (1) installation or maintenance; (2) fire, water, wind, lightning or other natural causes; (3) damaged caused by adverse environmental conditions, including without limitation, extreme temperatures, moisture, corrosive elements, dust or other air contaminants, radio frequency interference, electric power failure, power line voltages beyond those specified for the product, unusual physical, electrical or electromagnetic stress and/or other condition outside of Sioux Tools environmental specifications; (4) use of the product in combination or connection with other product, attachments, supplies or consumables not manufactured or distributed by Sioux Tools; or (5) failure to comply with any applicable federal, state or local regulation, requirement or specification governing emission analyzers and related supplies or consumables. Parts and labor needed to maintain your product and any replacement parts necessary do to normal wear and tear are not covered by this written warranty and are the Buyer's responsibility.

THE FOREGOING WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES NOT EXPRESSLY SET FORTH HEREIN, WHETHER EXPRESS OR IMPLIED BY OPERATION OF LAW OR OTHERWISE, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND SETS FORTH THE SOLE AND EXCLUSIVE REMEDY IN CONTRACT, TORT, STRICT LIABILITY OR OTHERWISE. SIOUX TOOLS DOES NOT GRANT ANY OTHER PERSON OR ENTITY PERMISSION TO CREATE FOR IT ANY WARRANTY, LIABILITY OR OBLIGATION IN CONNECTION WITH ITS PRODUCTS.

Sioux Tools shall not be liable for any incidental, special or consequential losses, costs or damages incurred by Buyer or others, directly or indirectly arising from the sale, handling or use of the products, or from any other cause with respect to the products or this warranty, whether such claim is based upon breach of contract, breach of warranty, strict liability in tort, negligence or any other legal theory (including without limitation, lost profits, revenues, anticipated sales, businesses opportunities, good will, or interruption of business or other injury or damage).

To the extent allowed by applicable law, this warranty and all rights and obligations hereunder, including matters of construction, validity and performance, shall be governed by the substantive laws of the state of Wisconsin, without giving effect to the principles of conflicts of law thereof.

## ISO 9001

In 1997 Sioux Tools received its ISO 9001 certification. This certification is essential to doing business in today's global marketplace. It affirms our dedication to quality and our continued commitment to improvement. It assures our customers that the products they purchase will consistently live up to the promise of performance. It also validates our target goal of achieving maximum quality in every stage of the process — from the initial concept and development all the way through the delivery of spare parts. Our customers can be certain that Sioux tools will live up to their high expectations and provide a long, trouble-free life.





# CATALOG GUIDE

## The Force of the Tool Industry

Sioux Tools is known around the world for quality, durability and performance. Our extensive and always expanding line of industrial power tools are engineered to make any job easier, safer and more efficient. We build tools that stand up to the demanding specifications required by today's industrial manufacturing, assembly and finishing needs.

Sioux Tools designs the tool to fit the application. Many businesses require tools that can deliver high performance but are not subject to the constant demands of industrial applications. To meet these requirements, Sioux developed the Force line. The Force lineup is designed primarily for the MRO (Maintenance Repair Operations) and manufacturing support functions, however, the quality of these tools will allow them to go beyond these typical support applications to fit the bill in many of your manufacturing processes. Force tools are designed to complement the durability and performance of our industrial line. Check out the following line of Force tools in this brochure.

### Drills • Ratchet Wrenches • Impact Wrenches Grinders • Cut-off Tool • Sanders Hammers • Scalers • Reciprocating Saw

#### Standard Equipment

Under this heading a specification is given for each type of tool and of the parts (nipples, keys, guards, etc.) supplied with the tool. A parts list and safety and instruction manual are always included in the package with every tool.

#### Air consumption

The air consumption of the tools is stated in standard cubic feet per minute (scfm) and liters per second (l/s) and relates to free air, i.e., the compressed air expanded to atmospheric pressure. Unless otherwise stated, the figures are valid at a working pressure of 90 psig (6.2 bar) and indicate the maximum air consumption unless otherwise stated. Maximum air consumption for non-governed tools is achieved at free speed when the tool is running at no load. A tool with governed speed control has the maximum air consumption at the maximum power output.

#### Speed

The tool speeds are indicated in revolutions per minute, (rpm), and indicate the free speed, i.e., the speed at which the tool runs at no load and at a working pressure of 90 psig (6.2 bar), unless otherwise specified. The speed at maximum output is estimated as 50% of the free speed for non-governed tools and 80-90% of the free speed for tools with governed speed control.

#### Weight and Length

The weight of the tools are listed in both pounds (lb) and kilograms (kg), and the length is listed in both inches (in) and millimeters (mm).

#### Side to Center

This measurement is taken from the center of the tool to the outside edge. It is useful for applications requiring the tool to fit into a precise or limited space.

#### Quick Conversion Chart

<p><b>Length</b></p> <hr/> <p>1 in. = 0.0254 m  1 m = 39.3701 in.  1 m = 3.2808 ft  1 in. = 25.4 mm  1 ft = 304.8 mm  1 mm = 0.03937 in.</p> <p><b>Weight</b></p> <hr/> <p>1 lb = 0.4536 kg  1 kg = 2.2046 lb</p>	<p><b>Torque</b></p> <hr/> <p>1 kpm = 9.8067 Nm  1 ft lb = 1.3558 Nm  1 in. lb = 0.1130 Nm  1 Nm = 0.1020 kpm  1 Nm = 0.7376 ft lb</p> <p><b>Pressure</b></p> <hr/> <p>1 bar = 100 kPa  1 kg/cm2 (at) = 98.0665 kPa  1 psi = 6.8948 kPa  1 kPa = 0.145 psi  1 kPa = 0.01 bar  1 kPa = 0.0101972 kg/cm2 (at)</p>	<p><b>Power</b></p> <hr/> <p>1 kgm/s = 9.8067 w  1 hp = 745.7 w  1 kw = 101.972 kgm/s  1 kw = 1.3410 hp</p> <p><b>Flow</b></p> <hr/> <p>1 m3/min = 16.6667 l/s  1 cfm = 0.4720 l/s  1 m3/h = 0.2778 l/s  1 l/s = 2.1189 cfm</p>
---	---	---





# DRILLS

## We Take On Any Job... Bit By Bit

Sioux Tools offers a wide selection of Force drills. With free speeds from 800 to 2,600 rpm we have the right drill for most applications and materials. The gears are designed and built tough to handle demanding jobs, yet even under load, operate quietly and efficiently. Composite housings have tough aluminum interior with comfortable nylon exterior. Force drills come in both reversing and non-reversing models.

### PISTOL GRIP DRILLS



**5440C**  
Features:  
• Keyed Chuck  
• Ergonomic Housing  
• Non-Reversible



**5440CKL**  
Features:  
• Keyless Chuck  
• Ergonomic Housing  
• Non-Reversible

#### Non-Reversing 0.5 hp (0.37 kW)



Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Spindle Thread
	in	mm		lb	kg	in	mm	
<b>Keyed Chuck</b>								
5440C	3/8	10	2600	2.3	1.05	6.5	165	3/8"-24
<b>Keyless Chuck</b>								
5440CKL	3/8	10	2600	2.3	1.05	6.8	170	3/8"-24

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure  
**Standard Equipment:** Parts List • Safety and Instruction Manual



**5445CR**  
Features:  
• Keyed Chuck  
• Ergonomic Housing  
• Reversible



**5450CR**  
Features:  
• Keyed Chuck  
• Ergonomic Housing  
• Reversible  
• Support Handle



**5450CRKL**  
Features:  
• Keyless Chuck  
• Ergonomic Housing  
• Reversible  
• Support Handle

#### Reversible 0.5 hp (0.37 kW)



Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Spindle Thread
	in	mm		lb	kg	in	mm	
<b>Keyed Chuck</b>								
5445CR	3/8	10	2000	2.3	1.05	6.5	165	3/8"-24
5450CR	1/2	13	800	2.9	1.35	7.6	195	3/8"-24
<b>Keyless Chuck</b>								
5445CRKL	3/8	10	2000	2.3	1.05	6.8	175	3/8"-24
5450CRKL	1/2	13	800	2.9	1.35	7.9	200	3/8"-24

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure  
**Standard Equipment:** Parts List • Safety and Instruction Manual



# DRILLS

## INLINE AIR DRILLS

### Features:

- Non-Reversible
- Lockoff Lever Throttle
- Built-in Speed Regulator
- Rear Exhaust
- Ergonomic Housing

### Non-Reversing 0.4 hp (0.30 kW)



Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Spindle Thread
	in	mm		lb	kg	in	mm	
<b>Keyed Chuck</b>								
5434C	3/8	10	2500	2.2	1.00	8.7	220	3/8"-24
<b>Keyless Chuck</b>								
5434CKL	3/8	10	2500	2.2	1.00	8.9	225	3/8"-24



5434C



5434CKL

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual

### Features:

- Reversible via Twist Ring
- Rear Exhaust
- Ergonomic Housing

### Reversing 0.4 hp (0.30 kW)



Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Spindle Thread
	in	mm		lb	kg	in	mm	
<b>Keyed Chuck</b>								
5430C	3/8	10	1400	2.3	1.05	8.5	215	3/8"-24
<b>Keyless Chuck</b>								
5430CKL	3/8	10	1400	2.3	1.05	8.6	220	3/8"-24

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) Performance rated @ 90 psig (6.2 bar) air pressure


**Standard Equipment:** Parts List • Safety and Instruction Manual



5430C



5430CKL

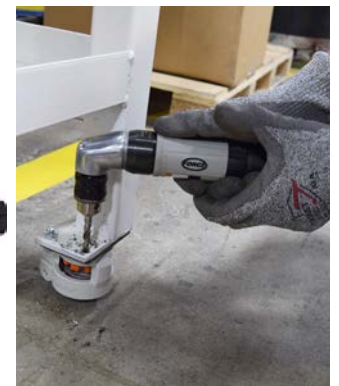

## RIGHT ANGLE DRILLS



2352

### Quick Change Chuck: Part No. 2352

Adapts 3/8"-24 threaded spindles to 1/4" hex quick change



SP510663 / SP510664

### Side Handle

Part Number	Description	Used On
510664	Clamp	5450CR
510663	Handle	5450CR

SP65562



SP67398

### Drill Chucks & Keys

Chuck Capacity	Thread Size	Chuck Part No	Key Part No	Key Holder No
0 - 1/4"	3/8"-24	SP21019B	30000	
1/16" - 3/8"	3/8"-24	SP21133	30002	14273
5/64" - 1/2"	3/8"-24	SP21132	30429	
1/16" - 3/8" <sup>1</sup>	3/8" - 24	SP65562		
1/32" - 3/8" <sup>1</sup>	3/8"-24	SP67398		

<sup>1</sup>Keyless Chuck • Keyed chucks include key



# ASSEMBLY

## We're Making A Big Impact

Built to a higher level of quality, Force Ratchets and Impact Wrenches and Impact Drivers are built a step above the standard. Manufactured from high quality materials, and utilizing the most advanced motor and clutch designs, these tools are constructed to hold in the toughest working environments.

### RATCHET WRENCHES

**Features:**

- Steel Angle Head
- Aluminum Housing
- Ergonomic Composite Grip



5009



5011

**Ratchet Wrenches**



Model Number	Drive Size		Bolt Cap Grade 5		Maximum Torque		Free Speed		Weight		Length		Avg Air Consumption	
	in		in	mm	ft lb	Nm	rpm		lb	kg	in	mm	scfm	l/s
5007	3/8		5/16	8	20	27	265		1.3	0.55	6.6	168	10	4.7
5009	1/4		5/16	8	20	27	265		1.5	0.5	6.6	168	10	4.7
5011	3/8		7/16	11	50	68	185		2.6	1.2	10.8	274	22	10
5013	1/2		7/16	11	50	68	185		2.6	1.2	10.8	274	22	10

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Head Cover • Parts List • Safety and Instruction Manual

### 3/8" IMPACT WRENCHES

**5045**

**Features:**

- Twin Hammer Mechanism
- Swivel Inlet
- Bail



**5038C**

**Features:**

- Twin Hammer Mechanism
- Robust 3-Piece Metal Housing
- High Torque Output



**5338A**

**Features:**

- Twin Hammer Mechanism
- Lightweight Composite Housing
- Quiet and Ergonomic



**3/8" Impact Wrenches**



Model Number	Drive Size	Socket Retainer Style	Bolt Cap Grade 5		Working Torque Range		Maximum Torque		Blows Per Minute	Free Speed	Weight		Length		Avg Air Consumption	
			in	mm	ft lb	Nm	ft lb	Nm			rpm	lb	kg	in	mm	scfm
5045	3/8	Friction	3/8	10	15-160	20-217	175	237	1850	9500	2.5	1.1	7.6	193	18	8.5
5045P	3/8	Pin	3/8	10	15-160	20-217	175	237	1850	9500	2.5	1.1	7.6	193	18	8.5
5038C	3/8	Friction	7/16	12	50-230	70-310	310	420	1300	10000	3.4	1.5	6	152	30	14
5039C	3/8	Pin	7/16	12	50-230	70-310	310	420	1300	10000	3.4	1.5	6	152	30	14
5338A	3/8	Friction	7/16	12	50-180	70-240	250	340	1100	10000	2.7	1.2	6.5	165	20	9.4
5338AP	3/8	Pin	7/16	12	50-180	70-240	250	340	1100	10000	2.7	1.2	6.5	165	20	9.4

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual



# ASSEMBLY

## 1/2" IMPACT WRENCHES



- 5000A**  
Features:
- Twin Hammer Mechanism
  - Front Exhaust



- 5050C**  
Features:
- Twin Hammer Mechanism
  - Robust 3-Piece Metal Housing
  - High Torque Output



- 5250C**  
Features:
- Pin Clutch Mechanism
  - Robust 3-Piece Metal Housing
  - High Torque Output



- 5350A**  
Features:
- Twin Hammer Mechanism
  - Lightweight Composite Housing
  - Quiet and Ergonomic

### 1/2" Impact Wrenches



Model Number	Drive Size in	Socket Retainer Style	Bolt Cap Grade 5		Working Torque Range		Maximum Torque		Blows Per Minute	Free Speed rpm	Weight		Length		Avg Air Consumption	
			in	mm	ft lb	Nm	ft lb	Nm			lb	kg	in	mm	scfm	l/s
5000A	1/2	Friction	5/8	16	80-300	110-410	425	580	1100	8000	5.6	2.5	7.4	188	30	14
5000AL	1/2	Friction	5/8	16	80-300	110-410	425	580	1100	8000	5.8	2.6	9.4	240	30	14
5050C	1/2	Friction	5/8	16	100-370	140-500	500	680	1100	7500	5.8	2.6	7.6	193	35	16
5050CL	1/2	Friction	5/8	16	100-370	140-500	500	680	1100	7500	6.0	2.7	9.7	246	35	16
5051C	1/2	Pin	5/8	16	100-370	140-500	500	680	1100	7500	5.8	2.6	7.6	193	35	16
5250C	1/2	Friction	5/8	16	100-370	140-500	500	680	860	7000	5.9	2.7	7.9	201	35	16
5350A	1/2	Friction	5/8	16	80-330	110-450	450	610	1000	7000	4.6	2.07	6.7	170	28	13
5350AP	1/2	Pin	5/8	16	80-330	110-450	450	610	1000	7000	4.6	2.07	6.7	170	28	13
5350AL	1/2	Pin	5/8	16	80-330	110-450	450	610	1000	7000	4.8	2.17	8.7	220	28	13

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual



# ASSEMBLY



## 3/4" IMPACT WRENCHES



### 5075C

Features:

- Twin Hammer Mechanism
- Robust 3-Piece Metal Housing with Steel Nose Housing
- High Torque Output
- Rubber Grip Pad



### 5090C

3/4" Impact with 1" Anvil

Features:

- Twin Hammer Mechanism
- Robust 3-Piece Metal Housing with Steel Nose Housing
- High Torque Output
- Rubber Grip Pad



### 5375A

Features:

- Twin Hammer Mechanism
- Lightweight Composite Housing
- Quiet and Ergonomic



## 3/4" Impact Wrenches



Model Number	Drive Size in	Socket Retainer Style	Bolt Cap Grade 5		Working Torque Range		Maximum Torque		Blows Per Minute	Free Speed rpm	Weight		Length		Avg Air Consumption	
			in	mm	ft lb	Nm	ft lb	Nm			lb	kg	in	mm	scfm	l/s
5075C	3/4	Friction/Hole	7/8	20	300-800	410-1090	1100	1500	800	5000	12.5	5.7	8.9	226	62	29
5075CL	3/4	Friction/Hole	7/8	20	300-800	410-1090	1100	1500	800	5000	14.5	6.6	15.2	386	62	29
5090C	1	Friction/Hole	7/8	20	300-800	410-1090	1100	1500	800	5000	12.8	5.8	9.1	231	62	29
5375A	3/4	Friction/Hole	7/8	20	275-700	370-950	950	1290	900	5000	8.5	3.8	9.5	240	40	19
5375AP	3/4	Hole	7/8	20	275-700	370-950	950	1290	900	5000	8.5	3.8	9.5	240	40	19

**General:** Air Inlet Size: 3/8" NPT • Recommended Hose Size: 1/2" (25 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual





# ASSEMBLY

## 1" IMPACT WRENCHES

### 5092C

Features:

- Rocking Dog Clutch
- Robust 3-Piece Metal Housing
- 4-Bolt Side Handle for Extra Durability



### 5093C

Features:

- Rocking Dog Clutch
- Robust 3-Piece Metal Housing
- 4-Bolt Side Handle for Extra Durability
- Steel Skidplates
- Interchangeable Trigger



### 5095C

Features:

- Twin-Hammer Mechanism
- Robust 3-Piece Metal Housing
- Lightweight and Compact
- Steel Skidplates
- Interchangeable Trigger



### 1" Impact Wrenches



Model Number	Drive Size in	Socket Retainer Style	Bolt Cap Grade 5		Working Torque Range		Maximum Torque		Blows Per Minute	Free Speed rpm	Weight		Length		Avg Air Consumption	
			in	mm	ft lb	Nm	ft lb	Nm			lb	kg	in	mm	scfm	l/s
5092C	1	Friction/Hole	1-1/8	27	600-1300	820-1770	1850	2520	440	4800	22.5	10.2	10.9	277	80	38
5092CL	1	Friction/Hole	1-1/8	27	600-1300	820-1770	1850	2520	440	4800	25.4	11.5	16.8	427	80	38
5093C	1	Friction/Hole	1-1/8	27	600-1400	820-1900	1950	2650	460	5000	23.8	10.8	13.5	343	80	38
5093CL	1	Friction/Hole	1-1/8	27	600-1400	820-1900	1950	2650	460	5000	26.7	12.1	19.8	503	80	38
5095C	1	Friction/Hole	1	24	500-1100	680-1500	1600	2180	730	4500	14.7	6.7	12.5	318	52	25
5095CL	1	Friction/Hole	1	24	500-1100	680-1500	1600	2180	730	4500	17.5	7.9	18.1	460	52	25

**General:** Air Inlet Size: 1/2" NPT • Recommended Hose Size: 1/2" (25 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual • D-Style Support Handle

## ASSEMBLY ACCESSORIES



### Quick Change Chuck

Adapts male square drive to female hex quick change

Part Number	Drive Size		Color
	Input (Square Drive)	Output (Hex)	
2530	3/8"	1/4"	1-13/16"
2520	1/2"	7/16"	



### Socket Retaining Pins with "O" Rings

Retaining Pin	"O" Ring	For Use On
34911	14318	3/4" Dr. Sockets 6620-6638
34664	14317	3/4" Dr. Sockets 6640-6654
34665	14319	Adaptor 2568, All 1" Dr. Sockets

### Ergonomic Handle Grip

#### Part No. 5002

For use with Model 5000A Impact





# ABRASIVE

## Make Easy Work Out Of A Daily Grind

Force grinders are ready to take on any application with the power to make the job fast and easy. This means new speeds and attachments to handle increased precision with ergonomic comfort. Our line-up of Force Grinders continues to be among the most popular in the industry. The choice of light, medium and heavy-duty performance allow you to own the right tool for the right job that remains cost-effective. We have both straight and right angle models to fit any application.

### DIE GRINDERS



5977



5978A



5979A

#### Pencil Die Grinders



Model Number	Collet Size	Free Speed	Weight		Length		Air Consumption	
		rpm	lb	kg	in	mm	scfm	l/s
5977	1/8	70000	0.45	0.20	6.0	152	5.8	2.7
<b>0.1 hp (0.07 kW)</b>								
5978A	1/8	54000	0.25	0.11	5.3	135	6.0	2.8
5979A	1/8	70000	0.25	0.11	5.3	135	7.0	3.3

**Standard Equipment:** 60" (1,524 mm) hose with hose protector included • Parts List • Safety and Instruction Manual



5053A



5054A

#### Straight Die Grinders



Model Number	Collet Size	Free Speed	Weight		Length		Air Consumption	
		rpm	lb	kg	in	mm	scfm	l/s
<b>0.3 hp (0.2 kW) - Light Duty Die Grinder</b>								
5053A	1/4	26000	0.8	0.4	5.3	135	28	13
<b>0.5 hp (0.4 kW) - Medium Duty Die Grinder</b>								
5054A	1/4	22000	1.3	0.6	6.5	165	28	13
5054A-19K	1/4	19000	1.3	0.6	6.5	165	28	13

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm)  
Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** 60" (1,524 mm) hose with hose protector included • Parts List • Safety and Instruction Manual



# FORCE TOOL BROCHURE ABRASIVE

## RIGHT ANGLE DIE GRINDERS



5055A

### Features:

- Lockoff Lever Throttle
- Comfort Grip
- Rear Exhaust
- Built-in Speed Regulator

### Right Angle Die Grinders



Model Number	Collet Size	Free Speed	Weight		Length		Head Height		Air Consumption	
		rpm	lb	kg	in	mm	in	mm	scfm	l/s
<b>0.3 hp (0.2 kW) - Light Duty Right Angle Die Grinder</b>										
5055A	1/4	20000	1.1	0.5	5.5	140	2.9	74	28	13
<b>0.5 hp (0.4 kW) - Medium Duty Right Angle Die Grinder</b>										
5056	1/4	16000	2.0	0.9	7.5	190	3.0	76	28	13



5056

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** 60' (1,524 mm) hose with hose protector included • Parts List • Safety and Instruction Manual

## RIGHT ANGLE TYPE 27 WHEEL GRINDERS

### Features:

- Lockoff Lever Throttle
- Aluminum Housing
- Built-in Speed Regulator

### Right Angle Heavy Duty Grinders



Model Number	Free Speed	Weight		Length		Head Height		Air Consumption		Spindle Size
	rpm	lb	kg	in	mm	in	mm	scfm	l/s	
<b>0.85 hp (0.63 kW) - 4 1/2" (115 mm) Right Angle Heavy Duty Grinder</b>										
5268	12000	3.9	1.7	10.0	254	3.5	90	28	13	5/8" - 11
<b>0.85 hp (0.63 kW) - 5" (127 mm) Right Angle Heavy Duty Grinder</b>										
5285	12000	3.9	1.7	10.0	254	3.5	90	28	13	5/8" - 11

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual



5268



5285

### Features:

- Rear exhaust
- Comfort Grip
- Lockoff lever throttle
- Aluminum housing
- 3/8" Arbor

### Cut-off Tool

Model Number	Free Speed	Blade Diameter		Weight		Length		Air Consumption		
	rpm	in	mm	lb	kg	in	mm	scfm	l/s	
<b>0.5 hp (0.4 kW)</b>										
5564A	21000	3.0	76	1.8	0.08	8.0	203	28	13	

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual



5564A



# FINISHING

## Making It Easy To Finish The Work

If you're in the market for tough tools that will deliver the performance you demand, then you've found what you need with Force sanders, polishers and buffers. These exceptional tools take on any application from repair and maintenance to manufacturing. With state-of-the-art orbital sanders, polishers and buffers you will get your work done faster and more efficiently than ever.



### SANDERS & POLISHERS



5540

#### Features:

- Aluminum Housing
- Built-in Speed Regulator

#### Pistol Grip Sander



Model Number	Free Speed	Weight		Length		Air Consumption		Spindle Thread
	rpm	lb	kg	in	mm	scfm	l/s	
5540	13000	2.2	1.0	4.3	109	28	13	7/16"-20

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm)

Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** 3" (75 mm) and 4-1/2" (115 mm) backing pads included • Parts List Safety and Instruction Manual

#### Features:

- Lockoff lever throttle
- Safety lever throttle
- Removable auxiliary handle and wrenches
- Built-in speed regulator
- Rear exhaust



5265

#### 5" (125 mm) Right Angle Air Sander



Model Number	Free Speed	Weight		Length		Air Consumption		Spindle Thread
	rpm	lb	kg	in	mm	scfm	l/s	
5265	7000	2.9	1.32	9.4	1.32	33	16	5/8"-11

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Backing pad for 5" (125 mm) abrasives included • Parts List • Safety and Instruction Manual





**SANDERS**

**Features:**

- Lockoff lever throttle
- Support handle can be mounted on either side
- Rear exhaust

**Right Angle Sander**



Model Number	Free Speed	Weight		Length		Air Consumption		Spindle Thread
	rpm	lb	kg	in	mm	scfm	l/s	
5287A	6000	4.4	2.0	12.6	320	35	17	5/8"-11

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm)  
Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Backing pad for 7" (180 mm) abrasives included • Parts List  
Safety and Instruction Manual



**5287A**

**Features:**

- Dual handles
- Positive lock paper clamps
- Paper size: 2-3/4" x 17-1/2" (70 x 445 mm)

**Dual Piston Inline Sander**

Model Number	Strokes Per Minute	Weight		Length		Air Consumption	
		lb	kg	in	mm	scfm	l/s
5560	2500	6.8	3.1	16.0	406	21	10

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Backing pad for 7" (180 mm) abrasives included • Parts List • Safety and Instruction Manual



**5560**

**Features:**

- Built-in speed regulator
- Dual action sanding
- Vinyl grip and head cover

**Dual Action Sander**

Model Number	Orbit Diameter		Free Speed	Weight		Height		Air Consumption	
	in	mm	rpm	lb	kg	in	mm	scfm	l/s
5558A	3/8	10	10000	4.3	2.0	5.4	137	28	13

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** 6" (150 mm) backing pad included • Parts List • Safety and Instruction Manual



**5558A**



## FINISHING ACCESSORIES


### Orbital Sander Backing Pads

Sioux random orbital backing pads are medium density, urethane pads rated for speeds up to 13,000 rpm. The 5" pads are 3/8" thick with low profile design, while the 6" pads are 5/8" thick with tapered profile for fine feathering in corners or around edges.

Part Number	Diameter		Backing	Profile	Style
	in	mm			
593	5	125	PSA <sup>1</sup>	Low	Non-Vac
593V	5	125	PSA <sup>1</sup>	Low	Vacuum
593J	5	125	H&L <sup>2</sup>	Low	Non-Vac
593JV	5	125	H&L <sup>2</sup>	Low	Vacuum
593SV	5	125	PSA <sup>1</sup>	Low	Screen Vac
594	6	150	PSA <sup>1</sup>	Tapered	Non-Vac
594V	6	150	PSA <sup>1</sup>	Tapered	Vacuum
594J	6	150	H&L <sup>2</sup>	Tapered	Non-Vac
594JV	6	150	H&L <sup>2</sup>	Tapered	Vacuum
594SV	5	125	PSA <sup>1</sup>	Low	Screen Vac

<sup>1</sup> PSA - Vinyl face for pressure sensitive adhesive sanding discs

<sup>2</sup> H&L - Hook and loop face

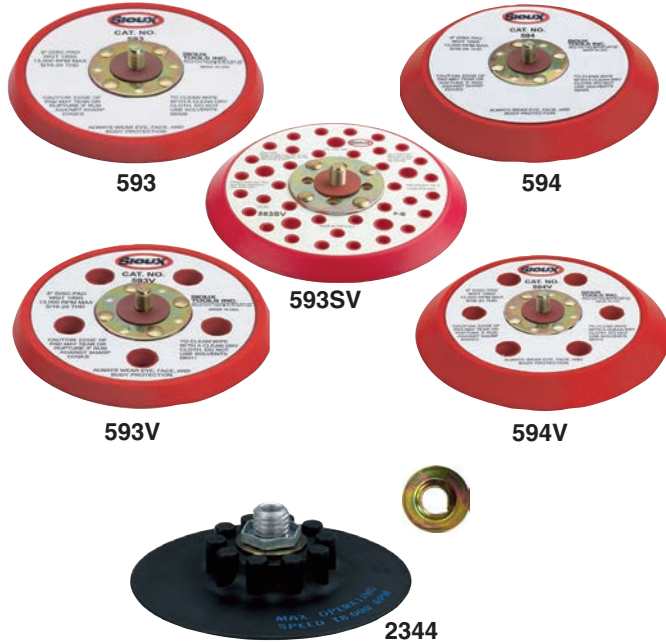

Part Number	Thread	Diameter	
		in	mm
2344	3/8-24 & 5/8-11	5	125

Includes disc nut 30750

### Fibre Backing Discs


#### Part No. 586

For use on 5540 series sander  
 Packaged in cartons of 6  
 Qty 3 - 3" (75 mm)  
 Qty 3 - 4-1/2" (110 mm)  
 Both have 7/8" (22 mm) arbor hole



### Speed-Lok Backing Pads

For use on tools with 1/4" collets

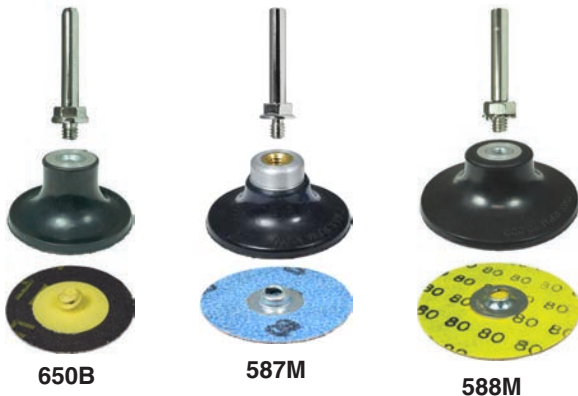

Part Number	Diameter		For Use On
	in	mm	
5205+	5	125	5265
5207*	7	180	5287A

\*includes disc nut No. 67630

+does not include disc nut No. 67630 (order separately)

### Features:

1/4" Shank  
 1/4"-20 Thread

Part Number	Type	Diameter		Max. rpm
		in	mm	
650B	R (plastic)	2	50	30000
587M	S (metal)	2	50	30000
588M	S (metal)	3	75	20000

\*Sanding Disc Not Included



Part Number	Diameter		For Use On
	in	mm	
SP505079	2.75 X 17.5	70 X 445	5560



# PERCUSSIVE

## Hammering Home A Point

Percussive tools, such as hammers, chippers and scalers, are commonly used in very abusive environments found in industries such as Foundry and Construction. Sioux Tools offers a variety of sizes, capacities and accessories built durable to ensure long life under tough operating conditions. We build them to work hard on the job, but not on you!

### HAMMERS



#### Features:

- Spring retainer
- Accepts 0.401 Parker Taper shanks
- Hardened steel barrel and piston
- Built-in Air Regulator
- Aluminum housing

#### Hammers

Model Number	Stroke Length		Bore Diameter		Blows Per Minute	Weight		Length	
	in	mm	in	mm		lb	kg	in	mm
5272A	1.6	41	0.8	20	4800	3.0	1.4	5.8	147
5273A	2.6	66	0.8	20	3200	3.8	1.7	7.1	180
5274A	3.8	97	0.8	20	2200	4.7	2.1	9.3	236

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual

### SCALERS



#### Features:

- Steel housing
- Hardened steel barrel and piston

#### Scalers

Model Number	Needles Included	Needle Length		Stroke Length		Bore Diameter		Blows Per Minute	Weight		Length	
		in	mm	in	mm	in	mm		lb	kg	in	mm
5262	19	7	180	3.0	75	0.9	23	3000	5.7	2.6	13.5	340
5263	12	5	125	2.0	51	0.7	18	4000	2.6	1.2	11.4	290
5266	19	7	180	2.0	51	1.0	25	4000	5.7	2.6	16.1	409

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual

# PERCUSSIVE



## PERCUSSIVE ACCESSORIES



Beehive Spring Retainers

Part Number	Description
2207	Chisel Retainer Spring (Use with all except those listed below)
2208	Must use 2208 with 2201B, 2205, 2216, 2217B, and 2219, 2220, 2239, 2244, 2245, 2246, 2247

.401 Parker Taper Shank



### 270 Rivet Sets

3-1/2" Overall Length

Rivet Head Cupping	Rivet Diameter Size				
	3/32" Part No	1/8" Part No	5/32" Part No	3/16" Part No	1/4" Part No
Button Head	N/A	2229	2230B	2231	2244*
Round Head	2232	2233	2234B	2235	2245*
Brazier Head	2236	2237B	2238	2239	2246*
Universal Head	2240	2241B	2242B	2243B*	2247*

3-1/2" (90 mm) overall length

\* Use 2208 Retainer



### Hammer Chuck

Part Number	Description	For Use ON
2270	Quick change air hammer chuck	5272A, 5273A, 5274A



### Scaling Needles

Part Number	Diameter	Length	Quantity	Used On
2259	0.12"	5"	12	Scalers
2260B	0.12"	5"	19	Scalers
2262	0.12"	7"	19	Scalers




### Hammer Accessories

.401 Parker Taper Shank

Part Number	Description	Width		Length	
		in	mm	in	mm
2201B*	Cutter	5/8	16	6	150
2202B	Chisel	5/8	16	6	150
2203	Rivet Buster	5/8	16	5-1/2	140
2204	Expansion Chisel	5/8	16	11	280
2205*	Scraper	1-1/4	30	6	150
2206	Punch			7	175
2210B	Punch			5	127
2212	Spot Weld Breaker			6	150
2213	Splitter			8	200
2214B	Edging Chisel			5	140
2215	Blank Chisel			6	150
2216*	Fork Chisel			6-7/8	175
2217B*	Rust Breaker			5-1/4	135
2218	Bushing Cutter			7	175
2219*	Bushing Driver			4-1/2	115
2220*	Bushing Chisel	1-5/8	40	7	175

\* Use 2208 Retainer

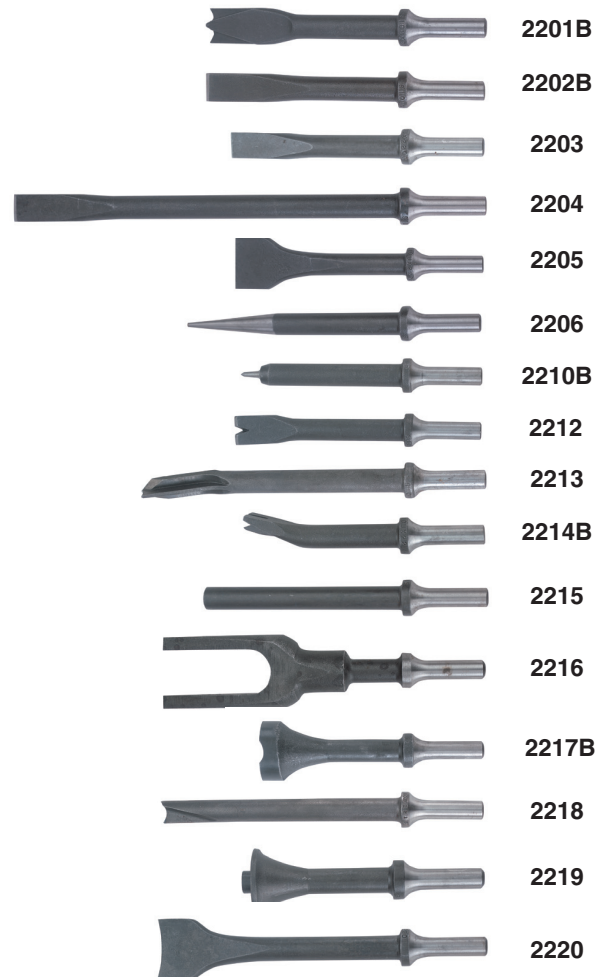





# SPECIALTY

## Special Applications Require Special Tools

Sioux Tools has a history of designing specialty tools for very specific applications, and as always, we manufacture the finest tools in the industry. These tools will live up to your expectations in both power and ergonomics.



### RECIPROCATING AIR SAW



5300A

#### Features:

- Comfort Grip Handle
- Adjustable Blade Guard
- Lockoff Lever Throttle
- Built-in Speed Regulator

#### Reciprocating Air Saw



Model Number	Strokes Per Minute	Weight		Length	
		lb	kg	in	mm
5300A	10000	1.8	0.8	9.2	235

**General:** Air Inlet Size: 1/4" NPT • Recommended Hose Size: 5/16" (8 mm)  
Performance rated @ 90 psig (6.2 bar) air pressure

**Standard Equipment:** Parts List • Safety and Instruction Manual



1823

#### Bi-Metal Saw Blade (5 Pack)

Part Number	Description	Length
1823	Bi-Metal Blade - 18 TPI	4" (100mm)
1824B	Bi-Metal Blade - 24 TPI	4" (100mm)
1825	Bi-Metal Blade - 32 TPI	4" (100mm)

### AIR ENGRAVING PEN



5980

#### Features:

- 13,000 cycles per minute
- Replaceable carbide tipped points
- Twist throttle
- 59" (1500 mm) hose
- 1/4" NPT air fitting
- High quality stainless steel housing
- Replaceable engraving points

- 506246 - 45° (STD)
- 506245 - 30°
- 506244 - 15°





## Filter, Regulator, Lubricator Assembly




Part Number	Inlet & Outlet	Height		Width		Depth		Bracket Spacing	
		in	mm	in	mm	in	mm	in	mm
1670	1/2" NPT	8.9	227	9.8	248	3.9	100	3.3	84

## Air Regulator

Part No. 1335B  
1/4" NPT Male / Female



## High-Capacity Quick Change Couplers



Part Number	Description	Thread
1316	Male Coupler Nipple	1/4" NPT
1317	Male Coupler Nipple	3/8" NPT
1318	Male Coupler Nipple	1/2" NPT
1391B	Quick Change Coupler	1/4" NPT
1392B	Quick Change Coupler	3/8" NPT
1393	Quick Change Coupler	1/2" NPT
1395	Female Coupler Nipple	1/4" NPT
1396	Female Coupler Nipple	3/8" NPT

## Nylon Recoil Air Hose



Part Number	ID		Length		Fittings
	in	mm	ft	m	
1326B	1/4	6	25	7.6	1/4" NPT
1327B	3/8	10	25	7.6	1/4" NPT



# GENERAL ACCESSORIES

## Sioux Swivel

Allows the air hose to rotate 360° on 2 axes



Part Number	Description
1338-25	1/4" non-regulated air swivel connector with safety pin
1338-38	3/8" non-regulated air swivel connector with safety pin
1338-50	1/2" non-regulated air swivel connector with safety pin
1338FC-25	1/4" regulated air swivel connector with safety pin

## Balancers




Part Number	Capacity		Cable Length	
	lb	kg	ft	m
2300-4	2 - 4	0.9 - 1.8	6.7	2
2300-6	4 - 6	1.8 - 2.7	6.7	2
2300-8	6 - 8	2.7 - 3.6	6.7	2

## Grease Gun

### Part No. 439

Use with impact wrenches and multi-assembly angle tools.  
For use with grease tube 1232A-04.

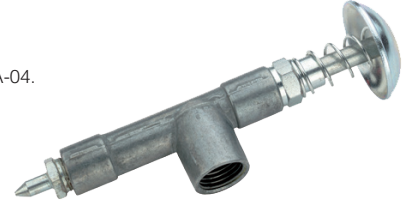

## Grease Nozzle

### Part No. 469A

Used with No. 468A grease gun.



## Grease

Part Number	Description
289A	4 Ounces
289A-1	2 Pounds
289A-2	6 Pounds
1198	6 Ounces
1198-1	2 Pounds
1198-2	6 Pounds
1232A-04	4 Ounces
1232A-1	1 Quart

## Air Motor Oil For Air Tools

### Part No. 288


1/2 Pint

### Part No. 288-1

1 Quart

### Part No. 288-2

2 Liter

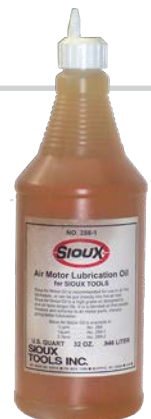



- ALABAMA**
- Birmingham**  
Motion Industries  
824 North 31st St.  
35203  
205-251-7522
- Dothan**  
Brackin Wholesale Coatings  
725 South Oates St.  
36301  
334-793-4330
- Winfield**  
McCaleb Tool Supply  
710 Hwy 43 South  
35594  
205-487-2222
- ARIZONA**
- Phoenix**  
Glenn's Tool Service  
2149 East Indian School Rd.  
85016  
602-264-6203
- ARKANSAS**
- Hot Springs**  
Arkansas Welding, Inc.  
230 Valley St.  
71901  
501-321-9922
- CALIFORNIA**
- Buena Park**  
Three Day Tool, Inc.  
6767 8th St.  
90620  
714-521-9180
- Rancho Dominguez**  
U.S. Air Tool Company  
1219 W. Mahalo Pl.  
90220  
310-632-5400
- Sonoma**  
Fastening Systems International  
1206 E. MacArthur St.  
95476  
800-344-2393
- FLORIDA**
- Doral**  
Air/Electric Tool & Equipment  
7840 Nw 58th St.  
33166  
305-593-5040
- Port Charlotte**  
Tropical Construction Supply  
18412 Paulson Dr.  
33954  
941-743-5863
- Spring Hill**  
R & R Tool Repair, Inc.  
13591 Linden Dr.  
34609  
352-263-3587
- Tampa**  
Compressed Air Systems, Inc.  
9303 Stannum St.  
33619  
800-626-8177
- GEORGIA**
- Atlanta**  
Fastenal  
6215 Fulton Industrial Blvd.  
30336  
404-346-1026
- Snellville**  
Kentec Inc.  
3250 Centerville Hwy.  
30039  
770-985-1907
- IOWA**
- Bloomfield**  
Gingerich Logging & Supply  
16700 Jade Ave.  
52537  
641-722-3414
- Des Moines**  
Peerless Supply Inc.  
1701 Guthrie Ave.  
50316  
515-265-9905
- Sioux City**  
The New Sioux City Iron Co.  
310 South Floyd Blvd.  
51101  
712-255-7696
- ILLINOIS**
- Machesney Park**  
Engman-Taylor Co Inc.  
7980 Burden Rd.  
61115  
800-236-7282
- INDIANA**
- Bristol**  
Tool Shed  
220 E Vistula St.  
46507  
574-848-7815
- Evansville**  
Lensing Tool & Supply  
306 No 7th Ave.  
47730  
812-425-9049
- Ferdinand**  
Superb Tooling, Inc.  
250 Scenic Industrial Dr.  
47532  
812-367-2102
- Indianapolis**  
Alcorn Industrial Inc.  
5412 Rock Hampton Court  
46268  
317-872-6772
- Indianapolis**  
Fastenal  
3939 W 56th St.  
46254  
317-472-4341
- Indianapolis**  
Vamaco Tool & Equipment Co.  
6718 East 38th St.  
46226  
317-632-2208
- KANSAS**
- Edwardsville**  
Fastenal  
9911 Woodend Rd.  
66111  
913-422-6440
- Shawnee**  
Clark's Tool Repair  
6217 Goddard St.  
66203  
913-268-1271
- KENTUCKY**
- Louisville**  
Rhino Assembly Service  
Center  
3600 Chamberlin Ln., Suite  
618  
40214  
502-753-0602
- LOUISIANA**
- Harahan**  
ATR, LLC  
629 S. Al Davis Rd.  
70123  
504-739-9481
- New Orleans**  
Beerman Precision Inc.  
4206 Howard Ave.  
70125  
504-486-9391
- MARYLAND**
- Cockeysville**  
Air Power-Baltimore  
243 Cockeysville Rd.  
21030  
410-785-5790
- MASSACHUSETTS**
- Everett**  
Panda Electrical Service  
165 Main St.  
02149  
617-389-1442
- MINNESOTA**
- Bloomington**  
Mars Supply  
215 E. 78th St.  
55420  
952-884-9388  
800-862-6093
- Duluth**  
Mars Supply  
4319 W. 1st St.  
55807  
218-628-0303
- Little Falls**  
Central McGowan  
16444 11th St. NE  
56345  
320-632-9218
- Minneapolis**  
Deko Factory Service  
3048 Bloomington Ave So  
55407  
612-721-6651
- Winona**  
Fastenal  
2003 Theurer Blvd.  
55987  
507-313-7527
- MISSOURI**
- St. Louis**  
John Henry Foster  
4700 LeBourget Dr.  
63134  
314-427-0600
- Farmington**  
US Tool Group  
2000 Progress Dr.  
63640  
1-800-222-1771
- Fenton**  
Productive Tool Products, Inc.  
1075 Headquarters Park Dr.  
63026  
636-305-1200
- Maryland Heights**  
Logan Gresham, Ltd  
2320 Mill Park Dr.  
63043  
314-521-2400
- MISSISSIPPI**
- Tupelo**  
Compressors & Tools Inc.  
105 Old Runway Rd.  
38801  
662-844-7023
- NORTH CAROLINA**
- Greensboro**  
Carolina Tool Sales And Repair,  
Inc.  
807 Huffman St.  
27405  
336-275-6124
- High Point**  
Air Power, Inc. (NC)  
1430 Trinity Ave.  
27260  
336-886-5081
- High Point**  
Fastenal  
4110 Premier Dr.  
Suite 102  
27265  
336-888-3013
- High Point**  
High Point Pneumatics Inc.  
2430 English Rd.  
27262  
336-889-8416
- NEBRASKA**
- Omaha**  
JDC Tool & Repair  
6263 Abbott Dr.  
68110  
402-455-8000
- OHIO**
- Apple Creek**  
Air Works  
10680 Dover Rd.  
44606  
330-698-0388
- Cleveland**  
Industrial Pneumatic  
1715 Brookpark Rd.  
44109  
216-398-7550
- Columbus**  
Mitchell-Mckinney Supply Co.  
610 Greenlawn Ave.  
43223  
614-444-6732
- Richfield**  
Ohio Tool Systems  
3863 Congress Parkway  
44286  
330-659-4181
- Youngstown**  
Power Tool & Supply Co.  
3699 Leharps Rd.  
44515  
330-792-1487
- OREGON**
- Milwaukie**  
Chas H Day Co, Inc.  
11405 SE 37th Ave.  
97222  
503-232-1659
- PENNSYLVANIA**
- Christiana**  
Beiler's Pneumatics  
718 Vintage Rd.  
17509  
610-593-7064



**U.S. Independent Service Centers****Jessup**

Fastenal  
1225 Mid Valley Dr.  
18434  
570-307-0992

**Myerstown**

Keystone Air Power  
60 Elco Dr.  
17067  
717-866-9224

**Robesonia**

Rowe Sales & Services, Inc.  
381 West Penn Ave.  
19551  
610-693-4031

**TENNESSEE****Jackson**

Compressors & Tools Inc.  
109 Anglin Lane  
38301  
731-421-8068

**Johnson City**

Summers Hardware & Supply  
Co.  
400 Buffalo St.  
37604  
423-461-4700

**Memphis**

DBH Distributors, Inc.  
3325 Millbranch Rd.  
38116  
901-348-1155

**Memphis**

Pro Power, Inc.  
7531 Bartlett Corp Cove E,  
Suite 101  
38133  
901-383-7888

**TEXAS****Denton**

Fastenal  
3833 Airport Rd.  
76207  
940-483-8667

**Grand Prairie**

CRC Inc. of Texas  
1209 W. Carrier Pkwy. Ste. 300  
75050  
972-647-0161

**Longview**

Texas Air Hydraulic Service  
& Sup  
251 S Eastman Rd.  
75602  
903-757-8211

**Nederland**

ATSCO (Associated Tool  
Specialties Company)  
3711 North Twin City Hwy.  
77627  
409-727-2166

**VIRGINIA****Portsmouth**

Hydraulic Service Co.  
3215 Victory Blvd.  
23702  
757-487-2513

**Richmond**

Kaman Industrial  
10402 Lakeridge Pkwy #100  
Ashland  
23005  
804 355 8041

**Roanoke**

Cardinal Tools, Sales & Service,  
Inc  
1546 Brownlee Ave SE  
24014  
540-981-9359  
800-542-5747

**Salem**

C & C Assembly  
2636 West Main St.  
24153  
540-904-6416

**WASHINGTON****Seattle**

Universal Repair Shop, Inc.  
1611 Boylston Ave.  
98122  
206-322-2726

**WEST VIRGINIA****Bluefield**

Larry's Pneumatic Service,  
LLC  
100 Princeton Ave.  
24701  
304-325-9262

**WISCONSIN****Green Bay**

Power Tool Service Co.  
1180 Ashwaubenon St.  
54304  
920-437-2594

**Menomonee Falls**

Engman-Taylor Co Inc.  
W142 N9351 Fountain Blvd.  
53051  
800-236-1975



## Canadian Independent Service Centers

### ALBERTA

**Edmonton**  
Quality Tool Repair  
11420-156 St.  
T5M 3N2  
780-702-1686

### Spruce Grove

Axis Torque Ltd  
302 Commerce Rd. N.  
T7X 3A5  
780-962-4499

### MANITOBA

**Winnipeg**  
Accutool Service Center  
532 Berry St.  
R3H 0R9  
204-772-6523

### NEWFOUNDLAND

**St. John's**  
Rideout Tool & Machine Inc  
222 Kenmount Rd.  
A1B 3R2  
709-754-2240

### NOVA SCOTIA

**Dartmouth**  
Rideout Tool & Machine Inc  
170 Akerley Blvd.  
B3B 1Z5  
902-468-2060

### ONTARIO

**Brampton**  
Grip Clinch Canada  
73 Ward Rd.  
M9W 6P3  
416-742-9161

### Brampton

HT Pneumatic  
22 Goodmark Pl  
M9W 6R2  
416-407-5739

### Etobicoke

H.T Pneumatic Rebuilders  
22 Goodmark Pl  
M9W 6R2  
416-407-5739

### London

Pryde Industrial Inc  
187 Exeter Rd.  
N6L 1A4  
519-690-1111

### QUEBEC

**Laval**  
FGL Tools Service  
949 Rue Michelin  
H7L 5B6  
450-972-7979

### St. Laurent

Phoenix Inc.  
5600 Vanden Abeels  
H4S 1P9  
514-334-5152

### Trois Rivières

Outil Mag  
2415 Rue De La Sidbec Sud.  
G8Z 4M6  
819-370-4848

### SASKATCHEWAN

**Regina**  
All Tool Repairs  
3100 - 12th Ave.  
S4T 1J7  
306-352-1756

## Latin America Independent Service Centers

### ARGENTINA

Assembly S.R.L.  
Brazin 1313 P.B. 4  
Capital Federal 1154  
Buenos Aires, Argentina  
Phone: (54-1) 304-7390

### BOLIVIA

Herracruz Importaciones  
Av. Roca Y Coronado # 295  
Santa Cruz de La Sierra  
Sebra, Bolivia  
Phone: (591) 335-41073

### BRAZIL

Sebra  
Snap-on-Latin  
American/Caribbean Division  
Rua Juscelino Kubitschek de  
Oliveira 470  
Distrito Industrial II  
Santa Barbara D' Oeste  
CEP 13456-401 SP  
Brazil  
Phone: (55-19) 2108-1000

### CHILE

Perfect Technology Chile S.A.  
Av. Americo Vespucio  
Norte 2880, Of 505  
El Cortijo, Conchali  
Santiago, Chile  
Phone: (56-2) 362-1153

### COLUMBIA

Servitools LTDA  
Carrera 58 Mp 14 - 14,  
Zona Industrial Puente  
Bogota, Colombia  
Phone: (57-1) 420-3599

### ECUADOR

Najomez  
Mosquera Narvaez 746 y  
Carvajal  
Quito, Ecuador  
Phone: (562) 2359845

### HONDURAS

Herramientas la Atlantica  
2da. Calle, 17 Ave. N.E.  
Col. Universal  
Carretera Vieja a La Lima  
San Pedro Sula  
Honduras  
Phone: (504) 557-6314

### MEXICO

Herramientas Holman S.A. DE C.V.  
Dr. Atl 1302  
Col. Roble San Nicolas  
San Nicolas De Los Garza, N.I.  
C.P. 66414  
Phone: (81) 8353 4183  
  
Lider Power Tools S.A. DE C.V.  
Gregorio Zambrano 500  
Residencial El Roble  
San Nicolas De Los Garza, N.I.  
C.p. 66414  
Phone: (81) 8350 8517

Puebla  
Puebla, Puebla, México  
Tel. 222 940 0313  
Whatsapp 222 531 2925

RC Maquinarias S.A. DE CV  
Calle Ignacio Zaragoza  
N° 377  
Col. San Pedro  
Puebla, Pue  
Mexico  
Phone: (52-222) 222-2587

RC Maquinarias S.A. de CV  
Subsidiary  
Calle Diego Rivera N° 39  
Privada Diego Rivera  
Col. Los Alcanfores C.P. 76150  
Queretaro  
Que, Mexico  
Phone: (52-442) 217-7435

Romihn Aguascalientes  
Aguascalientes, Aguascalientes,  
México  
Tel. 449 555 0276  
Whatsapp 449 205 4364

Romihn Cdmx (Mexico City)  
Tlalnepantla, Edo. de México, México  
Tel. 55 5039 1478  
Whatsapp 553 408 1489

Romihn Puebla  
Calle Adolfo López Mateos No. 90-B  
Col. San Pedro CP 72210  
Puebla, Puebla, México  
Tel. 222 940 0313  
Whatsapp 222 531 2925

Romihn Queretaro  
Corregidora, Querétaro, México  
Tel. 442 384 0144  
Whatsapp 442 595 3617

Romihn Queretaro Industrial Park  
Querétaro, Querétaro, México  
Tel. 442 628 2176  
Whatsapp 442 668 1414

Snap-on S un De Mexico,  
S.A. de C.V.  
Av Gustavo Baz, No. 166B  
Colonia La Escuela  
Tlalnepantla, Edo de Mixico  
Mexico 54090  
Phone: (52-55) 5010-3000  
www.snapon.com.mx

Snap-on Sun De Mexico,  
S.A. de C.V.  
Gustavo Baz No 180-F  
Tlalnepantla, Edo. de Mex.  
CP 54090  
Phone: (55) 5010 3060  
contactanos@snapon.com

### NICARAGUA

Sistemas de  
Seguridad Buhler S.A.  
Contiguo donde fue  
Cine Dorado  
Bolonia, Managua  
Nicaragua  
Phone: (505) 2222-6833

### PARAGUAY

H Petersen  
Av. Artigas 1552  
Asuncion, Paraguay  
Phone: (595-21) 202-615

### PERU

Energotec S.A.  
Calle Los Plasticos 204  
Ate- Lima 3  
Peru  
Phone : (51-1) 348-7570  
  
Igardí Herramientas S.A.  
Av. Javier Prado (FSTE) #1131  
Lima, Peru  
Phone : (30-5) 887-3533

### VENEZUELA

Refiteca  
Calle E. Boleita Norte  
Edificio Alexandro  
Local A. Semisotano  
Caracas, Venezuela  
Phone: (58-212) 235-8042

Hermaco  
Av. Intercomunal N° 428  
Ciudad Ojeda  
Estado Zulia, Venezuela  
Phone : (58-65) 260-994

## UK and Europe Independent Service Centers

### UK

Snap-on Tools LTD Repair Centre  
Telford Way Industrial Estate  
Kettering, Northants  
NN168 PU, Great Britain  
Phone: 011-44-1536-413903

### POLAND

Tri Color Industrial  
Ojcowska 110  
Cracow 31-344  
Phone: (48) 12-642-27-23

### THE NETHERLANDS

JCO Tools en Services  
Berkenblad 19  
3233 SR Oostvoorne  
(Zuid-Holland)  
Phone: (31) (0) 657829507



## Service

### Factory Authorized Service

Sioux Tools has Authorized Service Distributors conveniently located throughout the U.S., Canada and internationally to provide you with service virtually anywhere, anytime. Each is staffed with professional tool repair technicians who know Sioux tools, inside and out, and are able to provide complete and comprehensive repairs.

Each location features the newest in testing and inspection equipment to ensure your tool is repaired and serviced properly...the first time.

Every tool that is serviced or repaired is calibrated and tested to the latest standards guaranteeing you the best performance possible.

See inside back cover for a complete listing of Authorized Service Distributors.



## Training

### Committed to your Success

To ensure your personnel are knowledgeable about not only Sioux products, but all air tools and products, Sioux Tools conducts training seminars that cover all aspects of the tools we sell. We offer introductory training seminars to help you understand our entire line of tools and their basic operation. Advanced training is tailored to individual needs to help build the skill of an experienced student. In addition, hands-on training is available with particular focus on troubleshooting and repairing.

For additional information on Sioux Tools training seminars, please contact your Sioux Tools Sales Representative.

## Facility



*Our 168,000 ft<sup>2</sup> facility in Murphy, North Carolina employees approximately 300 associates. Tools are designed and manufactured right here, with a distribution center that ships daily around the globe.*



**siouxtools.com**



250 Snap-on Drive  
P.O. Box 1596  
Murphy, North Carolina USA 28906  
PH: 828.835.9765  
FAX: 828.835.9685  
TOLL FREE: 866.259.7291  
TOLL FREE FAX: 800.722.7236

Belgium  
Tel.: 32 (0)14 23 19 67  
Fax: 32 (0)14 23 26 27  
Email: [Industrial.be@snapon.com](mailto:Industrial.be@snapon.com)

Netherlands  
Tel.: 31 (0)88 0104000  
Fax: 31 (0)88 0104010  
Email: [Industrial.nl@snapon.com](mailto:Industrial.nl@snapon.com)

Latin America  
Tel.: 786-254-7765  
Fax: 786-534-9350  
e-mail: [latinamerica.caribbean@snapon.com](mailto:latinamerica.caribbean@snapon.com)

Germany  
Tel.: 49 2104 9509-0  
Fax: 49 2104 9509-99  
e-mail: [indus.germany@snapon.com](mailto:indus.germany@snapon.com)

Italy  
Tel.: 00 39 02 66 04 53 70  
Fax: 00 39 02 61 29 78 15  
e-mail: [indus.italia@snapon.com](mailto:indus.italia@snapon.com)

United Kingdom  
Tel.: 44 (0) 1536-413904  
Fax: 44 (0) 1536-413874  
e-mail: [industrialuk@snapon.com](mailto:industrialuk@snapon.com)

Asia  
Tel.: 65-6451-5570  
Fax: 65-6451-5574  
e-mail: [esales.sg@snapon.com](mailto:esales.sg@snapon.com)

Australia  
Tel.: 61 2 9837 9100  
Fax: 61 2 9624 2578  
e-mail: [SOTA.customerservice@snapon.com](mailto:SOTA.customerservice@snapon.com)